

23m

1W
LED

IP40

LBOARD A200 RIVA

One-sided exit luminaire in white made of sheet steel for dynamic escape route guidance.

The luminaire will be delivered as universal construction and can be used for ceiling or wall parallel mounting by using an optional wall adapter.

The pictogram of the luminaire is able to indicate two different states (evacuation and blocking).

An evacuation arrow direction (one-sided) can always be selected and must be specified separately when ordering.

The blocking symbol is an integral part of the disc and therefore cannot be deselected.





Technical specifications

Visibility distance	23 m
Connecting terminals Net	3 x 2,5 mm ² for double assignment
Connecting terminals RIVA	2 x 1,5 mm ² for double assignment
Casing/colour	Sheet steel, white other colours available on request
Type of assembly	Ceiling mounting, parallel wall mounting
Dimensions (W x H x D)	274 x 213 x 46 mm
Protection class	IP40
Safety class	I





■ Luminaires for central battery systems

Illuminant	1W LED-bar
Light current mains operation	130lm
Power consumption	4,5VA
Battery current input	11mA
Voltage supply	230V 50/60Hz / 220V DC +25/-20%
Temperature range	-10°C to +40°C
optional:	
Multi-switch and monitoring module	ELC, MSÜ3 SET009, SET010

Accessories

Accessories	Pictograms*
Cable assembly set	 Exit pictogram FR + „X“
Central pendulum	 Exit pictogram FL + „X“
Wire guard	 Exit pictogram FU + „X“
Chain assembly set	 Exit pictogram FO + „X“
Wall adapter, white	
Wall adapter (surface-mounted) with cable cut-out, white	
Wall bracket, white	

* 1 pictogram included in the delivery.
Please specify when ordering.

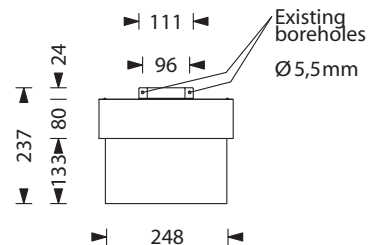



LBOARD A200 RIVA enables dynamic control of escape routes. The luminaire can block unsafe escape routes and, in an emergency, guides escapees via the safe escape routes out of the danger zone.

Escape route clear



Escape route blocked



The escape route is blocked with a red „X“, whereby the original escape direction is not actively illuminated. Different operating modes can be set on the luminaire, for example a static or flashing red „X“.

Connection: RIVA

BMZ

24V Control output

0V -> Escape route clear

24V -> Escape route blocked

