IP40 | IP20 | 3W LED | Colour

SPOT-LIGHT 80-AL ER-F/R

MADE in GERMANY


Safety luminaire in compliance with EN IEC 60598-1/2-22 and EN 1838.
Nearly ceiling-flush recessed safety luminaire with round head made of white polycarbonate.
To reduce maintenance costs, the battery of the single-battery version can be replaced without tools via a click system.
The optic for area illumination is pre-assembled, the optic for escape route illumination is included.
A square cover frame is optionally available.
Equipped with a 3W power LED and additional LED heat sink made of aluminum.



Technical specifications

Luminaire type	Luminaires for central battery systems	Self contained luminaires
Illuminant	3 W LED	3 W LED
Connecting terminals	2 x 2.5 mm² for double assignment	
Colour	white	
Material	Aluminum die-cast/Polycarbonate	
Mounting type	Recessed mounting	
Dimensions (Ø x D)	DE 80 x 47 mm	
Dimensions Container (W x H x D)	197 x 73 x 30 mm	
Ceiling cutout (Ø)	68 mm	
Min. installation depth	80 mm	
Protection class	IP40	
Protection class container	IP20	
Safety class	II	
IK Safety class	IK03	
Light current (mains)	280 lm	120 lm
Light current (emergency)		
Battery duration 1h	–	280 lm
Battery duration 3h	–	280 lm
Battery duration 8h	–	120 lm
Luminous flux Emergency (DC) / mains		
Battery duration 1h	–	100% / 45%
Battery duration 3h	–	100% / 45%
Battery duration 8h	–	45% / 45%
Power consumption	6 VA	5 VA
Battery current input	15 mA	–
Battery duration Battery operation	–	1h / 3h / 8h
Voltage supply	230V 50/60Hz; 220V DC +25/-20%	230V 50/60Hz
NiMH-battery		
Battery duration 1h	–	4,8V 2,0Ah
Battery duration 3h	–	4,8V 2,0Ah
Battery duration 8h	–	4,8V 2,0Ah
Temperature range	-10°C to +40°C	–
Non-maintained mode	–	0°C to +35°C
Maintained mode	–	-5°C to +30°C
optional		
Multi-switch and monitoring module	ELC MSÜ3 SET009 SET010	–
Self monitoring	–	SELF CHECK
Central monitoring	–	SAFELOG Line
Wireless monitoring	–	SAFELOG Wireless

Recessed mounting

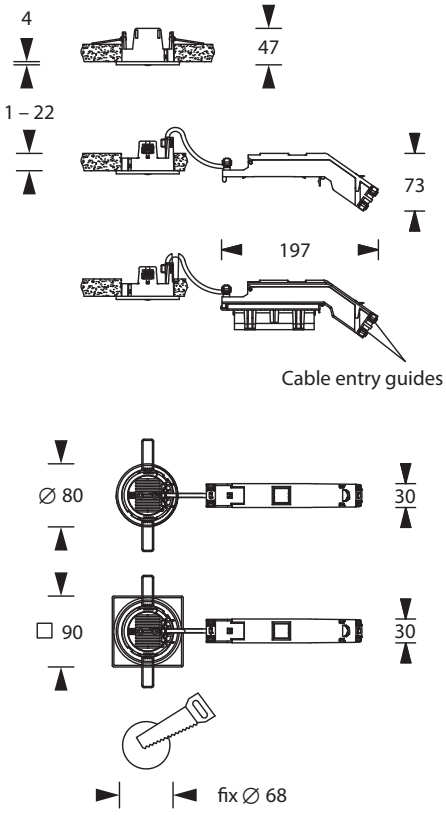

Attention: Minimum installation depth 80mm

Technical changes reserved / 04.11.2026

Accessories


Ceiling frame - Polycarbonate
Universal cover plate
5lx-optics accessories-set
Downlight-optics accessories-set

Use in device boxes

The following device boxes are compatible with the luminaire (not included in the scope of delivery)

Type	Manufacturer	Manufacturer Art. No.	Remarks
Concrete installation housings for on-side mixed concrete	KAISER	1281-00	HALOX 100 with tunnel 190 KAISER Art. No. 1281-30 with e.g. cover KAISER Art. No. 1281-03
Concrete installation housings for on-side mixed concrete	KAISER	1282-00	HALOX 180 with tunnel 190 KAISER Art. No. 1282-30 with e.g. cover KAISER Art. No. 1282-10

Lighting data and tables of luminaire distances (E = 1,25 lx)




Ceiling mounting

Luminaires for central battery systems **wide area optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED

Luminous flux emergency / mains: 280lm




h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00
a	10.50	11.90	13.20	14.10	14.60	14.90	14.80	14.60	14.20	12.00	9.90	7.80
b	4.70	5.10	5.20	5.20	5.00	4.50	3.30	2.00	0.90	0.80	0.80	0.80
c	10.50	11.90	13.20	14.10	14.60	14.90	14.80	14.60	14.20	12.00	9.90	7.80
d	4.70	5.10	5.20	5.20	5.00	4.50	3.30	2.00	0.90	0.80	0.80	0.80

Self contained luminaires **wide area optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED

Luminous flux emergency / mains: 280lm/120lm – **Battery duration: 1h**




h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00
a	10.50	11.90	13.20	14.10	14.60	14.90	14.80	14.60	14.20	12.00	9.90	7.80
b	4.70	5.10	5.20	5.20	5.00	4.50	3.30	2.00	0.90	0.80	0.80	0.80
c	10.50	11.90	13.20	14.10	14.60	14.90	14.80	14.60	14.20	12.00	9.90	7.80
d	4.70	5.10	5.20	5.20	5.00	4.50	3.30	2.00	0.90	0.80	0.80	0.80

Self contained luminaires **wide area optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED

Luminous flux emergency / mains: 280lm/120lm – **Battery duration: 3h**




h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00
a	10.50	11.90	13.20	14.10	14.60	14.90	14.80	14.60	14.20	12.00	9.90	7.80
b	4.70	5.10	5.20	5.20	5.00	4.50	3.30	2.00	0.90	0.80	0.80	0.80
c	10.50	11.90	13.20	14.10	14.60	14.90	14.80	14.60	14.20	12.00	9.90	7.80
d	4.70	5.10	5.20	5.20	5.00	4.50	3.30	2.00	0.90	0.80	0.80	0.80

Self contained luminaires **wide area optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED

Luminous flux emergency / mains: 120lm/120lm – **Battery duration: 8h**




h	2.50	3.00	3.50	4.00	4.50	5.00
a	9.00	9.60	9.70	9.50	7.70	6.00
b	3.40	3.20	2.40	1.10	1.00	1.00
c	9.00	9.60	9.70	9.50	7.70	6.00
d	3.40	3.20	2.40	1.10	1.00	1.00

Luminaires for central battery systems **escape route optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED




Luminous flux emergency / mains: 280lm

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00	8.50	9.00
a	18.20	20.40	22.50	24.30	25.90	27.40	28.90	27.60	27.50	21.00	16.00	14.00	10.00	8.00
b	8.00	8.90	9.60	10.10	10.50	10.30	9.10	6.20	6.20	6.00	6.00	6.00	6.00	4.00
c	–	–	–	–	–	–	–	–	–	–	–	–	–	–
d	–	–	–	–	–	–	–	–	–	–	–	–	–	–

Self contained luminaires **escape route optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED




Luminous flux emergency / mains: 280lm/120lm – **Battery duration: 1h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00	8.50	9.00
a	18.20	20.40	22.50	24.30	25.90	27.40	28.90	27.60	27.50	21.00	16.00	14.00	10.00	8.00
b	8.00	8.90	9.60	10.10	10.50	10.30	9.10	6.20	6.20	6.00	6.00	6.00	6.00	4.00
c	–	–	–	–	–	–	–	–	–	–	–	–	–	–
d	–	–	–	–	–	–	–	–	–	–	–	–	–	–

Self contained luminaires **escape route optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED




Luminous flux emergency / mains: 280lm/120lm – **Battery duration: 3h**

h	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00	8.50	9.00
a	18.20	20.40	22.50	24.30	25.90	27.40	28.90	27.60	27.50	21.00	16.00	14.00	10.00	8.00
b	8.00	8.90	9.60	10.10	10.50	10.30	9.10	6.20	6.20	6.00	6.00	6.00	6.00	4.00
c	–	–	–	–	–	–	–	–	–	–	–	–	–	–
d	–	–	–	–	–	–	–	–	–	–	–	–	–	–

Self contained luminaires **escape route optics**

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED



Luminous flux emergency / mains: 120lm/120lm – **Battery duration: 8h**

h	2.50	3.00	3.50	4.00	4.50	5.00
a	15.50	17.10	18.60	18.00	12.00	10.00
b	6.60	7.00	6.90	4.30	4.00	3.00
c	–	–	–	–	–	–
d	–	–	–	–	–	–