30m | IP40 | 1,5 W LED | 3W LED | Colour

# ALULINE A300 UM

MADE in GERMANY

**Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.**
Simple and modern design, made of high quality aluminum in the color white or black, special colors possible.
By simply remounting the container, the luminaire is universally suitable for ceiling and wall surface mounting. A 90 degree twisted wall parallel mounting is also possible, a corresponding pictogram set is optionally available.
With the two accessory sets central pendant and rope mounting, the luminaire is extremely versatile and versatile.
The 10 mm light-deflecting pane is illuminated by a 1,5 or 3 Watt LED-bar.
The luminaire price includes one pictogram foil set - arrow left/right/down/up/blind (Visibility distance 30 m).




## Technical specifications


| **Luminaire type** | **Luminaires for central battery systems** | | **Self contained luminaires** | |
|---|---|---|---|---|
| Illuminant | 1.5 W LED-bar | 3 W LED-bar | 1.5 W LED-bar | 3 W LED-bar |
| Visibility distance | 30 m | | | |
| Luminance | DIN 4844-1 > 500 cd/m² | | | |
| Connecting terminals | 2 x 2.5 mm² for double assignment | | | |
| Colour | white / black | | | |
| Material | Aluminum die-cast | | | |
| Mounting type | Wall-/ceiling mounting | | | |
| Additional mounting types* | Ceiling mounting (wire suspension), Pendulum mounting | | | |
| Dimensions (W x H x D) | DM 329 x 233 x 83 mm<br>WM 329 x 203 x 53 mm | | | |
| Pane dimensions (W x H x D) | 323.5 x 187.5 x 10 mm | | | |
| Protection class | IP40 | | | |
| Safety class | II | | | |
| IK Safety class | IK03 | | | |
| Light current (mains) | 190 lm | 350 lm | 190 lm | 350 lm |
| Luminous flux Emergency (DC) / mains | | | | |
| Battery duration 1h | – | – | 40% / 100% | 20% / 100% |
| Battery duration 3h | – | – | 40% / 100% | 20% / 100% |
| Battery duration 8h | – | – | 20% / 100% | 10% / 100% |
| Power consumption | 5 VA | 6 VA | 5 VA | 6 VA |
| Battery current input | 12 mA | 19 mA | – | |
| Battery duration Battery operation | – | | 1h / 3h / 8h | |
| Voltage supply | 230V 50/60Hz; 220V DC +25/-20% | | 230V 50/60Hz | |
| NiMH-battery | | | | |
| Battery duration 1h | – | – | 4,8V 0,8Ah | 4,8V 0,8Ah |
| Battery duration 3h | – | – | 4,8V 0,8Ah | 4,8V 0,8Ah |
| Battery duration 8h | – | – | 4,8V 0,8Ah | 4,8V 0,8Ah |
| Temperature range | -10°C to +40°C | | – | |
| Non-maintained mode | – | | 0°C to +35°C | |
| Maintained mode | – | | -5°C to +30°C | |
| optional | | | | |
| Multi-switch and monitoring module | ELC<br>MSÜ3<br>SET009<br>SET010 | | – | |
| Self monitoring | – | | SELF CHECK | |
| Central monitoring | – | | SAFELOG Line | |
| Wireless monitoring | – | | SAFELOG Wireless | |

* Optional accessory required

## Ceiling mounting

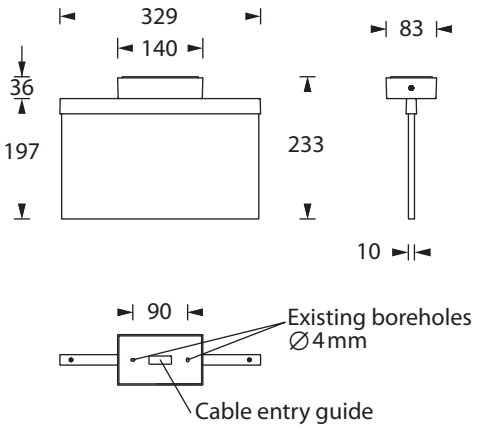


## Wall mounting

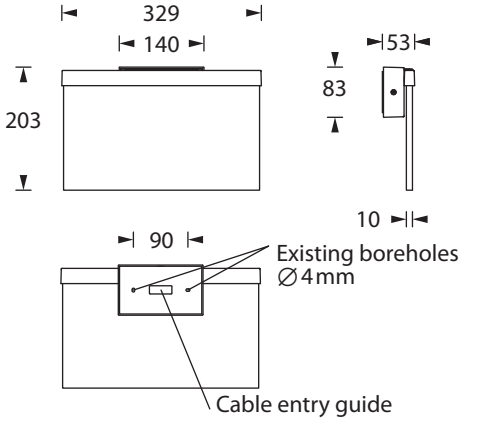





Technical changes reserved / 04.11.2026

## Pictogram-set - included in the delivery



## Optional pictograms (-sets)

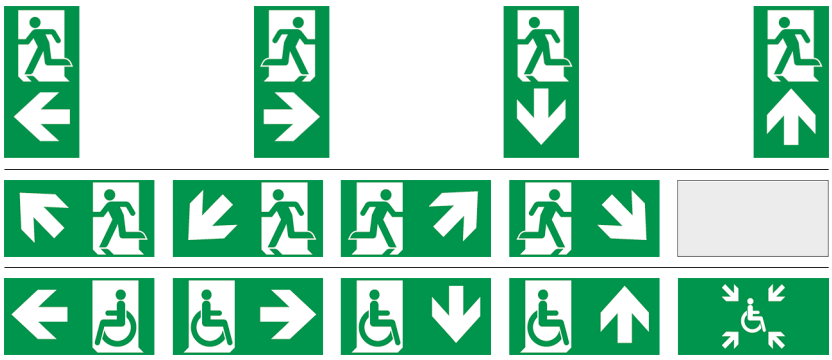

## Accessories

| |
|---|
| Back Box ALULINE |
| Central pendulum - ALULINE |
| Cable assembly set ALULINE - conducting |
| Pictograms |



Technical changes reserved / 04.11.2026