10m | IK07 | IP65 | 2W LED | Colour

STAIR-LIGHT W

Safety luminaire in compliance with EN IEC 60598-1/2-22 and EN 1838.
Almost wall-flush luminaire body made of die-cast aluminum, powder-coated in black, rectangular design for recessed wall or step mounting.
The luminaire body is equipped with a high-power LED module and can be inserted into a concrete recessed box.
Can be used as an exit sign luminaire with an optional pictogram set for a viewing distance of 10 meters.

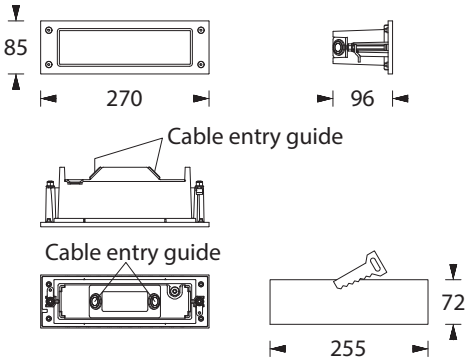


Figure shows accessory

Technical specifications

Luminaire type	**Luminaires for central battery systems**
Illuminant	2 W LED-bar
Visibility distance	10 m
Connecting terminals	3 x 2.5 mm² for double assignment
Colour	black
Material	Aluminum die-cast
Light color	6500K
Mounting type	Wall/step recessed mounting
Dimensions (W x H x D)	WE 270 x 85 x 96 mm
Dimensions wall cutout (L x W)	255 x 72 mm
Installation depth	124 mm
Protection class	IP65
Safety class	I
IK Safety class	IK07
Light current (mains)	260 lm
Power consumption	5.5 VA
Battery current input	14 mA
Voltage supply	230V 50/60Hz; 220V DC +25/-20%
Temperature range	-10°C to +40°C
optional	
Multi-switch and monitoring module	DALI ELC MSÜ3 SET009 SET010

Wall-/step recessed mounting




Accessories

Cement assembly box
Pressure compensation valve
Pictograms

Technical changes reserved / 22.11.2026

Lighting data and tables of luminaire distances (E = 1,25 lx)

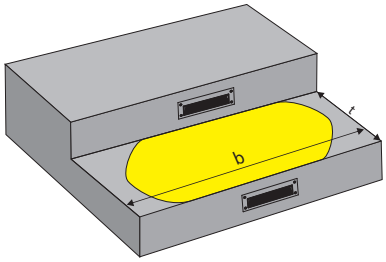


Step mounting


Luminaires for central battery systems

Distance table for plane emergency routes / distance data in meters

Illuminant: 2W LED-bar

Luminous flux emergency / mains: 260lm

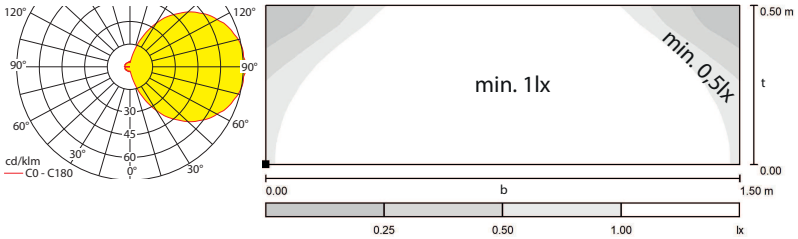

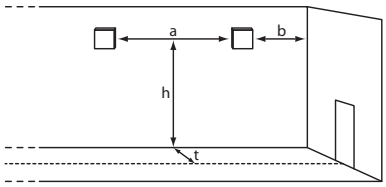


Wall mounting

Luminaires for central battery systems **Wide area illumination**

Distance table for plane emergency routes / distance data in meters

Illuminant: 2W LED-bar

Luminous flux emergency / mains: 260lm



t = 1.00	h	0.10	0.20	0.30	0.40	0.50
	a	1.90	2.50	2.80	2.90	3.20
	b	0.60	0.90	1.00	1.10	1.20
t = 1.50	h	0.10	0.20	0.30	0.40	0.50
	a	0.60	1.80	2.50	2.80	3.10
	b	0.10	0.50	0.80	1.00	1.10