

30m

1,5W  
LED3W  
LED

IP40

# LBOARD A300

Housing made from steel sheeting, powder coated in white.

Available as wall-parallel and ceiling-mounted version with 10 mm light-deflecting pane and exchangeable pictogram-set.


Optionally available with a 1,5 resp. 3 watt LED-bar.

## Technical specifications

Visibility distance	30 m
Connecting terminals	3 x 2,5 mm <sup>2</sup> for double assignment
Casing/colour	Sheet steel, white other colours available on request
Type of assembly	Parallel wall mounting, ceiling mounting
Dimensions (W x H x D)	350 x 253 x 46 mm
Protection class	IP40
Safety class	I



Illuminant	■ Luminaires for central battery systems		■ Self contained luminaires	
	1,5W LED-bar	3W LED-bar	1,5W LED-bar	3W LED-bar
Light current mains operation	190lm	350lm	190lm	350lm
Luminous flux				
Emergency (DC) / mains	-		15% - 50% / 100%	
Power consumption	5VA	6VA	5VA	6VA
Battery current input	12mA	19mA	-	
Rated operating time				
Battery operation	-		1h/3h/8h	
Voltage supply	230V 50/60Hz / 220V DC +25/-20%		230V 50/60Hz	
NiMh-Akku	-		4,8V 0,8Ah	
Temperature range	-10°C to +40°C		-	
non-maintained mode	-		-0°C to +35°C	
maintained mode	-		-5°C to +30°C	
optional:				
Multi-switch and monitoring module	MSÜ3 SET009 SET010	MSÜ3 SET009 SET010 DALI	-	
Self monitoring	-		SELF CHECK	
Central monitoring	-		SAFELOG	

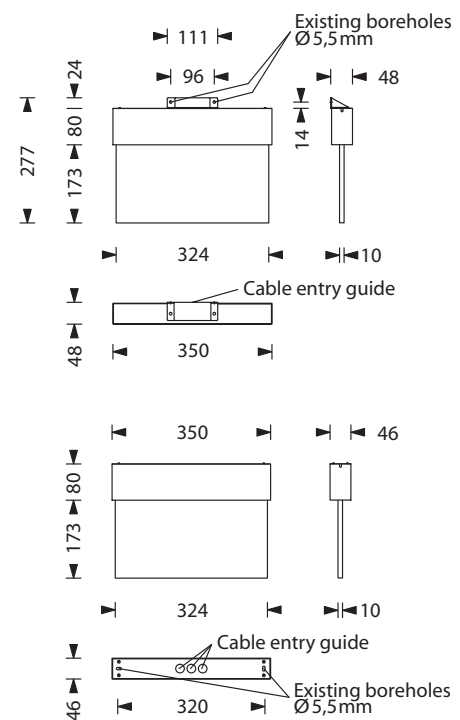

## Accessories

Accessories	Pictogram-set*
Chain assembly set only for ceiling mounting	Exit pictogram FR
Wire guard for wall mounting	Exit pictogram FL
Central pendulum	Exit pictogram FU
Cable assembly set only for ceiling mounting	Blind pane
Wall adapter, white	
Wall bracket, white	
Wall adapter, white with cable cutout	

\* Pictogram-set included in the delivery.  
Other pictograms available on request.

Technische Änderungen vorbehalten/Technical changes reserved