

23m

2W  
LED

IP40

# VARIOLINE 200

Appealing and architectural design through a combination of round and square anodized aluminum profiles.


Optionally used for ceiling mounting or by simply moving the upper part for wall mounting.

The pictogram-set delivered with a 10mm light-deflecting pane is illuminated with a 2 watt LED-bar.

## Technical specifications

Visibility distance	23 m
Connecting terminals	3 x 2,5 mm <sup>2</sup> for double assignment
Casing/colour	Aluminum, anodized
Type of assembly	Universal mounting
Dimensions (W x H x D)	
Ceiling mounting	258 x 188 x 29mm
Wall mounting	258 x 154 x 63mm
Protection class	IP40
Safety class	I

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	2W LED-bar	2W LED-bar
Light current mains operation	260lm	260lm
Luminous flux		
Emergency (DC)/mains	-	15% - 50% / 100%
Power consumption	5,5VA	5,5VA
Battery current input	14mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	MSÜ3, SET009, SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG

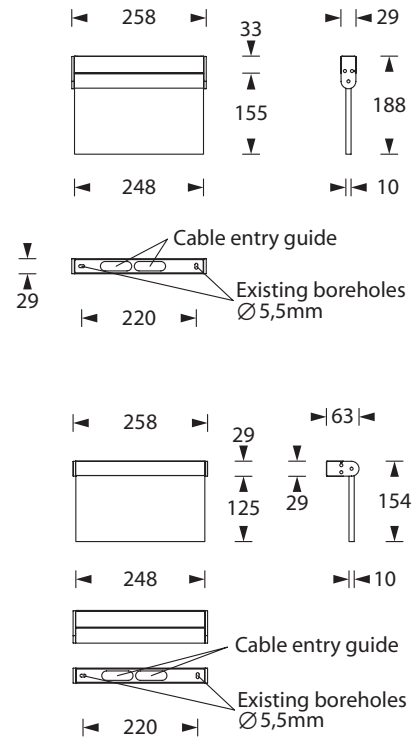

## Accessories

Accessories	Pictogram-set*
Wire guard	Exit pictogram FR
	Exit pictogram FL
	Exit pictogram FU
	Blind pane

\* Pictogram-set included in the delivery.  
Other pictograms available on request.