

30m

1,5W
LED3W
LED

IP40

COMPACT 300

Extremely lean casing from anodized aluminum continuous casting with screwless cover caps.


Universal assembly for ceiling and wall mounting by turns of the upper light profile.

The 10 mm light deflecting pane is illuminated with a 1,5 watt or 3 watt LED-bar and is delivered with a pictogram-set.

Technical specifications

Visibility distance	30 m
Connecting terminals	3 x 2,5 mm ² for double assignment
Casing/colour	Aluminum continuous casting, anodized
Type of assembly	Universal mounting
Dimensions (W x H x D)	
Ceiling mounting	332 x 228 x 35 mm
Wall mounting	332 x 226 x 37 mm
Protection class	IP40
Safety class	I

Illuminant	■ Luminaires for central battery systems		■ Self contained luminaires	
	1,5W LED-bar	3W LED-bar	1,5W LED-bar	3W LED-bar
Light current mains operation	190lm	350lm	190lm	350lm
Luminous flux				
Emergency (DC)/mains	-		15% - 50% / 100%	
Power consumption	5VA	6VA	5VA	6VA
Battery current input	12mA	19mA	-	-
Rated operating time				
Battery operation	-		1h/3h/8h	
Voltage supply	230V 50/60Hz / 220V DC +25/-20%		230V 50/60Hz	
NiMh-Akku	-		4,8V 0,8Ah	
Temperature range	-10°C to +40°C		-	
non-maintained mode	-		-0°C to +35°C	
maintained mode	-		-5°C to +30°C	
optional:				
Multi-switch and monitoring module	MSÜ3, SET009, SET010		-	
Self monitoring	-		SELF CHECK	
Central monitoring	-		SAFELOG	

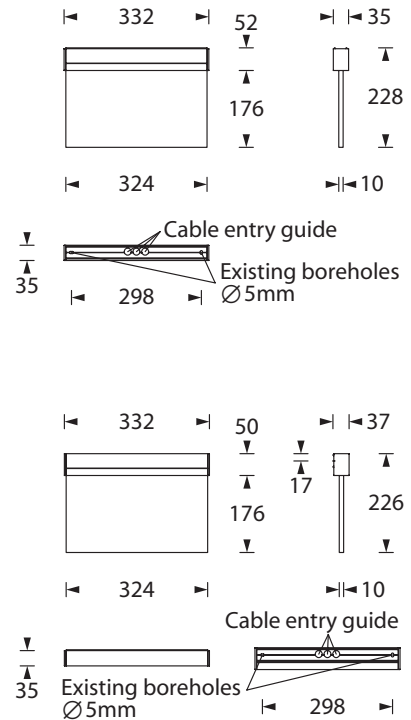

Accessories

Accessories	Pictogram-set*
Cable assembly set	Exit pictogram FR
Chain assembly set	Exit pictogram FL
Central pendulum	Exit pictogram FU
Wire guard only for wall mounting	Blind pane

* Pictogram-set included in the delivery.
Other pictograms available on request.