

30m

3W  
LED

IP40

# VARIOLINE 300

Appealing and architectural design through a combination of round and square anodized aluminium profiles.


Optionally used for ceiling mounting or by simply moving the upper part for wall mounting.

The pictogram-set delivered with a 10mm light-deflecting pane is illuminated with a 3 watt LED-bar.

## Technical specifications

Visibility distance	30 m
Connecting terminals	3 x 2,5 mm <sup>2</sup> for double assignment
Casing/colour	Aluminum, anodized
Type of assembly	Universal mounting
Dimensions (W x H x D)	
Ceiling mounting	334 x 231 x 29 mm
Wall mounting	334 x 197 x 63 mm
Protection class	IP40
Safety class	I

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	3W LED-bar	3W LED-bar
Light current mains operation	350lm	350lm
Luminous flux		
Emergency (DC)/mains	-	15-50%/100%
Power consumption	6VA	6VA
Battery current input	19mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	MSÜ3, SET009, SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG

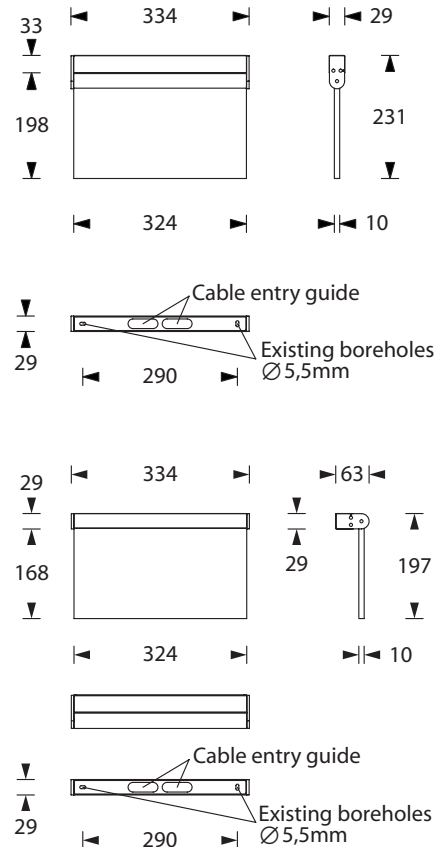

## Accessories

Accessories	Pictogram-set*
Wire guard	Exit pictogram FR
	Exit pictogram FL
	Exit pictogram FU
	Blind pane

\* Pictogram-set included in the delivery  
Other pictograms available on request