

17m

1,5W
LED

IP40

VARIOLINE 170

Appealing and architectural design through a combination of round and square anodized aluminium profiles.

Optionally used for ceiling mounting or by simply moving the upper part for wall mounting.





The pictogram-set delivered with a 10mm light-deflecting pane is illuminated with a 1,5 watt LED-bar.

Technical specifications

Visibility distance	17 m
Connecting terminals	3 x 2,5 mm ² for double assignment
Casing/colour	Aluminum, anodized
Type of assembly	Universal mounting
Dimensions (W x H x D)	
Ceiling mounting	200 x 164 x 29 mm
Wall mounting	200 x 131 x 63 mm
Protection class	IP40
Safety class	I

■ Luminaires for central battery systems

Illuminant	1,5W LED-bar
Light current mains operation	190lm
Power consumption	5VA
Battery current input	12mA
Voltage supply	230V 50/60Hz / 220V DC +25/-20%
Temperature range	-10°C to +40°C
optional:	
Multi-switch and monitoring module	MSÜ3, SET009, SET010

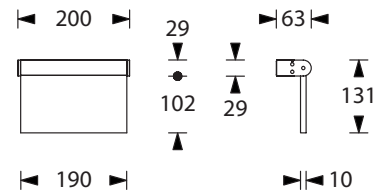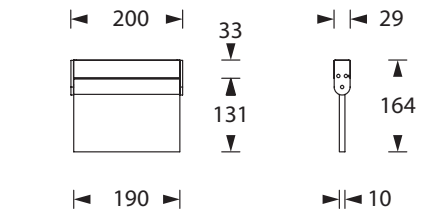

Accessories

Wire guard

Pictogram-set*

Exit pictogram FR

Exit pictogram FL

Exit pictogram FU

Blind pane

* Pictogram-set included in the delivery
Other pictograms available on request