

23m

1W
LED2W
LED

IP40

S-LINE 200 DMS

Extremely lean polycarbonate housing in an appealing design. Easy to handle locking mechanism without screws.


Available as ceiling mounted version with wire suspension (wire length 1,5m) for the pane unit. Optionally: Recessed mounting with recessed ceiling frame.

The pictogram-set delivered with a 10mm light-deflecting pane is illuminated with a 1 watt or 2 watt LED-bar.

Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate, white
Type of assembly	Wire mounting (ceiling and recessed mounting)
Dimensions (W x H x D)	
Ceiling mounting	265 x 216 x 37 mm
Protection class	IP40
Safety class	II

Illuminant	■ Luminaires for central battery systems		■ Self contained luminaires	
	1W LED-bar	2W LED-bar	1W LED-bar	2W LED-bar
Light current mains operation	130lm	260lm	130lm	260lm
Luminous flux				
Emergency (DC)/mains	-		15-50%/100%	
Power consumption	4,5VA	5,5VA	4,5VA	5,5VA
Battery current input	11mA	14mA	-	
Rated operating time				
Battery operation	-		1h/3h/8h	
Voltage supply	230V 50/60Hz / 220V DC +25/-20%		230V 50/60Hz	
NiMh-Akku	-		4,8V 0,8Ah	
Temperature range	-10°C to +40°C		-	
non-maintained mode	-		-0°C to +35°C	
maintained mode	-		-5°C to +30°C	
optional:				
Multi-switch and monitoring module	MSÜ3 SET009, SET010		-	
Self monitoring	-		SELF CHECK	
Central monitoring	-		SAFELOG	

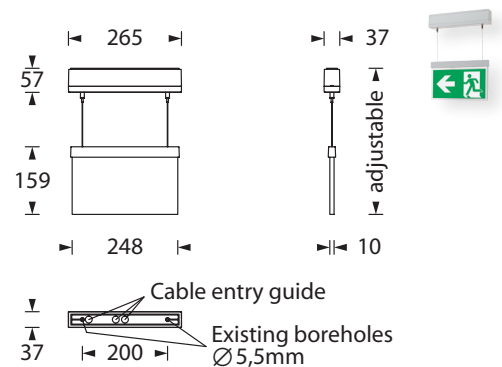

Accessories

Ceiling mounting frame only for recessed mounting

Pictogram-set*

Exit pictogram FR

Exit pictogram FL

Exit pictogram FU

Blind pane for single-sided pictogram mounting

* Pictogram-set included in the delivery
Other pictograms available on request



optional: Recessed ceiling frame