

30m

1,5W
LED

IP54

SMARTLUX 300 WM

Appealing, modern IP54 exit sign luminaire made of white polycarbonate and clear cover for wall mounting.

Easy to install due to screwless click system. Pictogram-set included.

Equipped with 1,5 Watt LED-bar.


Technical specifications

Visibility distance	30 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate/white (Light cover clear)
Type of assembly	Wall mounting
Dimensions (W x H x D)	313 x 174 x 54 mm
Protection class	IP54
Safety class	II



	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	1,5W LED-bar	1,5W LED-bar
Light current mains operation	190lm	190lm
Luminous flux		
Emergency (DC)/mains	-	15% -50% / 100%
Power consumption	5VA	5VA
Battery current input	12mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module ¹⁾	MSÜ3, SET009, SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG

¹⁾ On request also available DALI with 3W LED-bar as central battery version.

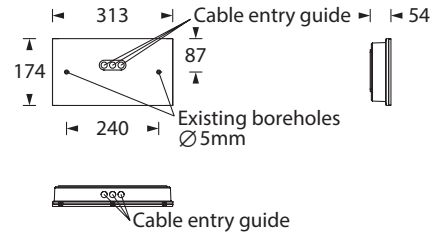

Accessories

Accessories	Pictogram-set*
Wire guard	Exit pictogram FR
Recessed installation frame	Exit pictogram FL
	Exit pictogram FU

* Pictogram-set included in the delivery.
Other pictograms available on request.

Concrete construction

Universal installation housing *	Kaiser item no. 1297-34 408 x 308 x 135 mm (L x W x D)
----------------------------------	---

* not included in the delivery



Recessed installation frame