

23m

1W  
LED2W  
LED

IP43

# H-LINE 200 UM

Lean polycarbonate casing with a transparent light cover for double sided insertable pictograms for universal mounting. Can be used optional as ceiling mounting or wall mounting with pre-cut fixation and cable entry holes from top and back.

No screws for quick and easy mounting.

Optionally: Recessed mounting with recessed ceiling frame.





The luminaire is equipped with either 1 watt or 2 watt LED-bar and pictogram foil set.


## Technical specifications

Visibility distance	23 m			
Connecting terminals	2 x 2,5 mm <sup>2</sup> for double assignment			
Casing/colour	Polycarbonate, white			
Type of assembly	Universal mounting (optional: recessed ceiling frame)			
Dimensions (W x H x D)	265 x 184 x 37 mm			
Protection class	IP43			
Safety class	II			

Illuminant	■ Luminaires for central battery systems		■ Self contained luminaires	
	1W LED-bar	2W LED-bar	1W LED-bar	2W LED-bar
Light current mains operation	130lm	260lm	130lm	260lm
Luminous flux				
Emergency (DC)/mains	-		15% - 50% / 100%	
Power consumption	4,5VA	5,5VA	4,5VA	5,5VA
Battery current input	11mA	14mA	-	
Rated operating time				
Battery operation	-		1h/3h	
Voltage supply	230V 50/60Hz / 220V DC +25/-20%		230V 50/60Hz	
NiMh-Akku	-		4,8V 0,8Ah	
Temperature range	-10°C to +40°C		-	
non-maintained mode	-		-0°C to +35°C	
maintained mode	-		-5°C to +30°C	
optional:				
Multi-switch and monitoring module	MSÜ3 SET009 SET010		-	
Self monitoring	-		SELF CHECK	
Central monitoring	-		SAFELOG	

## Accessories

Accessories	Pictogram-set*
Cable assembly set only for ceiling mounting	 Exit pictogram FR
Chain assembly set only for ceiling mounting	 Exit pictogram FL
Central pendulum only for ceiling mounting	 Exit pictogram FU
Wire guard only for wall mounting	 Blind pane for single-sided pictogram mounting
Ceiling mounting frame only for recessed mounting	* Pictogram-set included in the delivery. Other pictograms available on request.
Wall bracket	

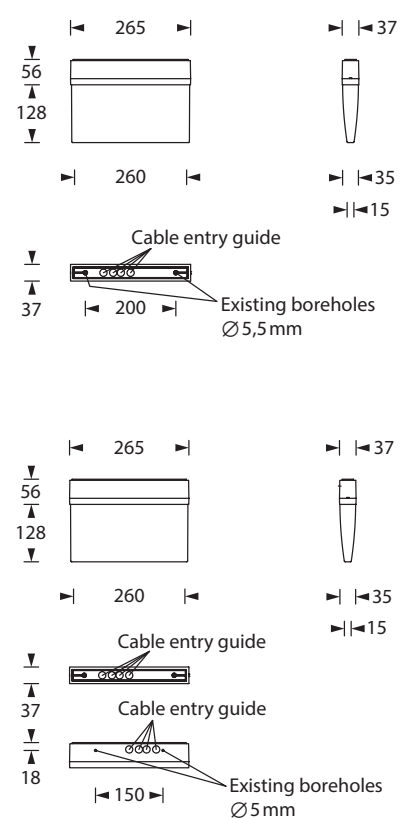

optional: Recessed ceiling frame