

23m

2W
LED

IP54

SMARTLUX 200 DM

Appealing, modern IP54 exit sign luminaire made of white polycarbonate and clear cover for ceiling mounting.

Easy to install due to screwless click system. Pictogram-set included.


Equipped with 2 Watt LED-bar.



Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate/white (Light cover clear)
Type of assembly	Ceiling mounting
Dimensions (W x H x D)	243 x 139 x 62 mm
Protection class	IP54
Safety class	II

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	2W LED-bar	2W LED-bar
Light current mains operation	240lm	240lm
Luminous flux		
Emergency (DC)/mains	-	15% -50% / 100%
Power consumption	5,5VA	5,5VA
Battery current input	14mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h/3h/8h	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	MSÜ3, SET009, SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG

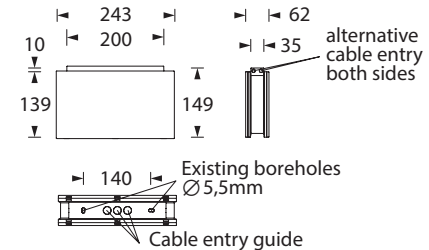

Accessories

Accessories	Pictogram-set*
Chain assembly set	Exit pictogram FR
Central pendulum	Exit pictogram FL
Cable assembly set	Exit pictogram FU
Wall bracket, white	Blind pane

* Pictogram-set included in the delivery.
Other pictograms available on request.