

60m

8x3,5W
LED

IP54




CUBE H-600

Modern, cubic luminaire housing made of anodized aluminum frame and folding upper part made of polycarbonate. The luminaire comes with three printed pictogram panes and one opal pane. The product is of very rugged construction and quick to install.

The luminaire is equipped with 8 x 3,5 watt high-power LED technic.

Technical specifications

Visibility distance	60 m
Connecting terminals	3 x 2,5 mm ² for double assignment
Casing/colour	Aluminum anodized / sheet steel / polycarbonate
Type of assembly	Ceiling mounting (see accessories)
Dimensions (W x H x D)	655 x 385 x 65 mm
Protection class	IP54
Safety class	I

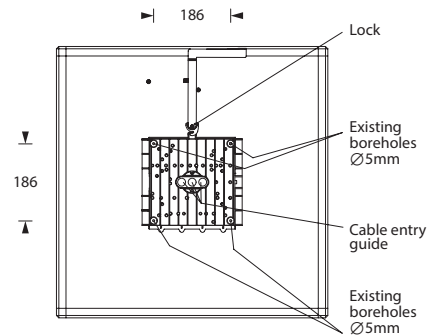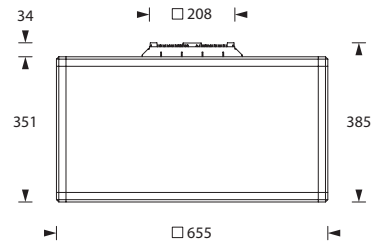

■ Luminaires for central battery systems

Illuminant	8 x 3,5W LED-bar
Light current	4000lm
Power consumption	35VA
Battery current input	145mA
Voltage supply	230V 50/60Hz / 220V DC +25/-20%
Temperature range	-10°C to +40°C
optional:	
Multi-switch and monitoring module	MSÜ3, SET009, SET010, DALI

Accessories

Accessories	Pictogram-set *
Chain assembly set	Exit pictogram FR
Cable assembly set	Exit pictogram FL
	Exit pictogram FU
	Opal pane

* Panes included and already mounted.
Other pictograms available on request.