

45m

4x3,5W
LED

IP54

CUBE L-450



The product is not in line with DIN EN 1838 supplement 1:2018-11

Modern, cubic luminaire housing made of plastic with three sided printed pictogram panes and one green pane.

The luminaire is equipped with 4 x 3,5 watt high-power LED technic.

Technical specifications

Visibility distance	45 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate, white
Type of assembly	Ceiling mounting (see accessories)
Dimensions (WxHxD)	303 x 237 x 303 mm
Protection class	IP54
Safety class	II

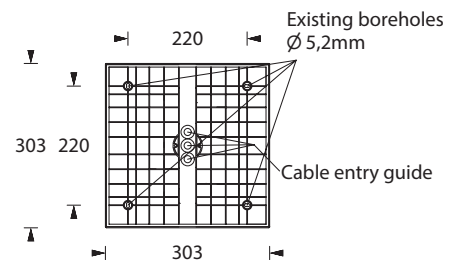

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	4 x 3,5W LED-bar	4 x 3,5W LED-bar
Light current mains operation	950lm	950lm
Luminous flux		
Emergency (DC)/mains	-	15% -50% / 100%
Power consumption	13VA	18VA
Battery current input	34mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h/3h	-	4,8V 2,0Ah
NiMh-Akku 8h	-	4,8V 4,2Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	ELC, MSÜ3, SET009, SET010, DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless

Accessories

Central pendulum

Chain assembly set

Cable assembly set

Wall bracket, white