

3W  
LED

IP20

Farbe / Colour



# L-STAR ED

Almost ceiling flush luminaire body made of aluminum die-cast, powder-coated in white in round design for recessed ceiling installation.

To reduce maintenance costs, the battery in the self-contained version can be replaced without tools via a click system.

Optionally available with optics for wide area or escape route illumination.


The luminaire can also be installed together with a HALOX concrete recessed housing. <sup>1)</sup>



## Technical specifications

Connecting terminals	2 x 2,5 mm <sup>2</sup> for double assignment
Casing/colour	Aluminum/polycarbonate/white other colours available on request
Type of assembly	Recessed mounting
Dimensions	
Luminaire (Ø x H)	90 x 37 mm
Container (W x H x D)	197 x 73 x 30 mm
Protection class	IP20
Safety class	II

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	3W LED	3W LED
Light current	280lm	50lm (net)
Rated operating time 1h/3h	-	280lm (emergency)
Rated operating time 8h	-	120lm (emergency)
Luminous flux		
Emergency (DC)/mains 1h/3h	-	100% / 20%
Emergency (DC)/mains 8h	-	45% / 20%
Power consumption	6VA	5VA
Battery current input	15mA	-
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h/3h/8h	-	4,8V 2,0Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	ELC, MSÜ3, SET009, SET010	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless

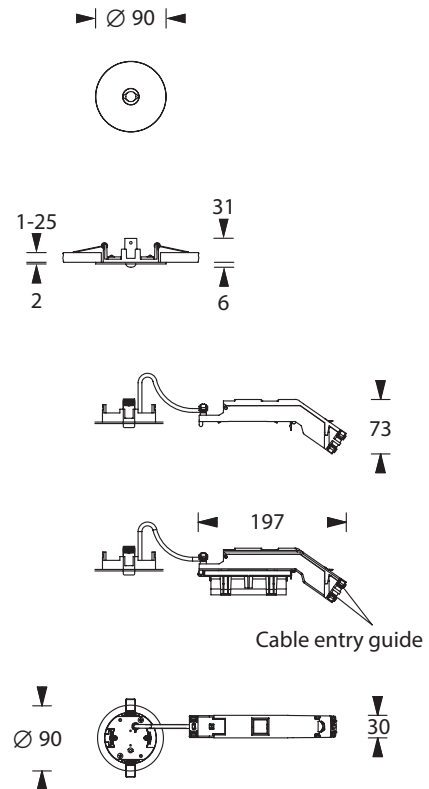


## Accessories


Hall downlight 60° accessories-set

5lx-optic accessories-set

<sup>1)</sup> Approved concrete installation housings from Comp. Kaiser (not included in the delivery): Recessed housings for on-side mixed concrete



HALOX 100 Kaiser Art. No. 1281-00  
with tunnel 190 Kaiser Art. No. 1281-30  
with e.g. cover Kaiser Art. No. 1281-03




HALOX 180 Kaiser Art. No. 1282-00  
with tunnel 190 Kaiser Art. No. 1282-30  
with e.g. cover Kaiser Art. No. 1282-10

Ø 76

Attention: Minimum installation depth 80mm

Technische Änderungen vorbehalten/Technical changes reserved

# Lighting datas and tables of luminaire distances (E = 1,25 lx)

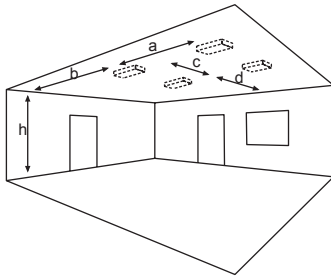

Ceiling mounting

## Luminaires for central battery systems Wide area optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
 Luminous flux emergency/mains: 280lm / 280lm

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
b	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-
c	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
d	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-

## Self contained luminaires Wide area optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
 Luminous flux emergency/mains: 280lm/50lm – **Rated operating time:: 1h/3h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
b	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-
c	10,50	11,90	13,20	14,10	14,60	14,90	14,80	14,60	14,20	12,00	9,90	7,80	-	-	-	-	-	-	-
d	4,70	5,10	5,20	5,20	5,00	4,50	3,30	2,00	0,90	0,80	0,80	0,80	-	-	-	-	-	-	-

Illuminant: 3W LED  
 Luminous flux emergency/mains: 120lm/50lm – **Rated operating time:: 8h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	9,00	9,60	9,70	9,50	7,70	6,00	-	-	-	-	-	-	-	-	-	-	-	-	-
b	3,40	3,20	2,40	1,10	1,00	1,00	-	-	-	-	-	-	-	-	-	-	-	-	-
c	9,00	9,60	9,70	9,50	7,70	6,00	-	-	-	-	-	-	-	-	-	-	-	-	-
d	3,40	3,20	2,40	1,10	1,00	1,00	-	-	-	-	-	-	-	-	-	-	-	-	-

## Luminaires for central battery systems Escape route optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
 Luminous flux emergency/mains: 280lm / 280lm

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	18,20	20,40	22,50	24,30	25,90	27,40	28,90	27,60	27,50	21,00	16,00	14,00	10,00	8,00	-	-	-	-	-
b	8,00	8,90	9,60	10,10	10,50	10,30	9,10	6,20	6,20	6,00	6,00	6,00	6,00	4,00	-	-	-	-	-
c	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

## Self contained luminaires Escape route optics

Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
 Luminous flux emergency/mains: 280lm/50lm – **Rated operating time:: 1h/3h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	18,20	20,40	22,50	24,30	25,90	27,40	28,90	27,60	27,50	21,00	16,00	14,00	10,00	8,00	-	-	-	-	-
b	8,00	8,90	9,60	10,10	10,50	10,30	9,10	6,20	6,20	6,00	6,00	6,00	6,00	4,00	-	-	-	-	-
c	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Illuminant: 3W LED  
 Luminous flux emergency/mains: 120lm/50lm – **Rated operating time:: 8h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	11,50
a	15,50	17,10	18,60	18,00	12,00	10,00	-	-	-	-	-	-	-	-	-	-	-	-	-
b	6,60	7,00	6,90	4,30	4,00	3,00	-	-	-	-	-	-	-	-	-	-	-	-	-
c	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-