

3W  
LED

IP20





# SMART-KIT


Small safety luminaire with aluminum cooling body for mounting at existing luminaires or lighting systems. Preassembled optic for wide area illumination and also enclosed optic for escape route illumination.

## Technische Daten

Connecting terminals	2 x 2,5 mm <sup>2</sup> for double assignment
Casing/colour	Aluminum / Polycarbonate / white
Type of assembly	Surface mounting
Dimensions (WxHxD)	83 x 37 x 16 mm
Protection class	IP20
Safety class	II



	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	3W LED	3W LED
Light current	280lm	120lm (net)
Rated operating time 1h/3h	-	280lm (emergency)
Rated operating time 8h	-	120lm (emergency)
Luminous flux		
Emergency (DC)/mains 1h/3h	-	100% / 45%
Emergency (DC)/mains 8h	-	45% / 45%
Power consumption	6VA	5VA
Battery current input	15mA	-
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h/3h/8h	-	4,8V 2,0Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	ELC, MSÜ3, SET009, SET010, DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless

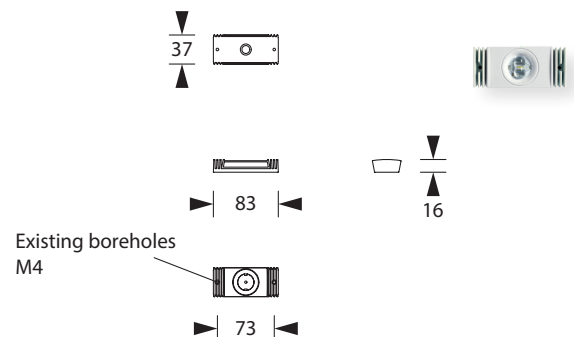

For installation in foreign luminaires with protection class I: Note grounding!


## Dimensions driver and battery

Driver	Dimensions (WxHxD)	Distance mounting holes
Central battery non-monitored	76 x 23 x 22 mm	74 mm
Central battery monitored & single battery	110 x 23 x 22 mm	104 mm
Battery	Dimensions (WxHxD)*	Distance mounting holes
Battery pack 4,8 Volt - 2,0Ah	155 x 25 x 25 mm	148 mm

\*incl. caps

Technische Änderungen vorbehalten/Technical changes reserved

# Lighting datas and tables of luminaire distances (E = 1,25 lx)



Surface mounting

## ■ Luminaires for central battery systems Wide area optic Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
Lamp luminous flux emergency (DC)/mains: 280lm / 280lm

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	12,00
a	10,40	11,70	12,40	12,70	12,70	12,70	12,60	12,60	12,10	10,00	8,50	6,70	-	-	-	-	-	-	-
b	4,40	4,50	4,50	4,40	4,10	3,30	2,00	1,90	1,90	1,50	1,00	0,80	-	-	-	-	-	-	-
c	10,40	11,70	12,40	12,70	12,70	12,70	12,60	12,60	12,10	10,00	8,50	6,70	-	-	-	-	-	-	-
d	4,40	4,50	4,50	4,40	4,10	3,30	2,00	1,90	1,90	1,50	1,00	0,80	-	-	-	-	-	-	-

## ■ Self contained luminaires Wide area optic Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
Lamp luminous flux emergency (DC)/mains: 280lm/ 120lm – **Rated operating time: 1h/3h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	12,00
a	10,40	11,70	12,40	12,70	12,70	12,70	12,60	12,60	12,10	10,00	8,50	6,70	-	-	-	-	-	-	-
b	4,40	4,50	4,50	4,40	4,10	3,30	2,00	1,90	1,90	1,50	1,00	0,80	-	-	-	-	-	-	-
c	10,40	11,70	12,40	12,70	12,70	12,70	12,60	12,60	12,10	10,00	8,50	6,70	-	-	-	-	-	-	-
d	4,40	4,50	4,50	4,40	4,10	3,30	2,00	1,90	1,90	1,50	1,00	0,80	-	-	-	-	-	-	-

Illuminant: 3W LED  
Lamp luminous flux emergency (DC)/mains: 120lm/ 120lm – **Rated operating time: 8h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	12,00
a	8,70	8,80	8,80	8,60	7,70	5,70	-	-	-	-	-	-	-	-	-	-	-	-	-
b	3,10	3,00	2,20	0,80	0,80	0,80	-	-	-	-	-	-	-	-	-	-	-	-	-
c	8,70	8,80	8,80	8,60	7,70	5,70	-	-	-	-	-	-	-	-	-	-	-	-	-
d	3,10	3,00	2,20	0,80	0,80	0,80	-	-	-	-	-	-	-	-	-	-	-	-	-

## ■ Luminaires for central battery systems Escape route optic Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
Lamp luminous flux emergency (DC)/mains: 280lm / 280lm

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	12,00
a	18,80	21,00	23,00	24,60	25,90	26,00	25,70	25,70	22,00	19,50	17,00	12,50	-	-	-	-	-	-	-
b	8,20	8,90	9,50	9,20	8,00	7,00	5,80	5,80	5,00	4,50	4,00	3,50	-	-	-	-	-	-	-
c	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

## ■ Self contained luminaires Escape route optic Distance table for plane emergency routes / distance data in meters

Illuminant: 3W LED  
Lamp luminous flux emergency (DC)/mains: 280lm/ 120lm – **Rated operating time: 1h/3h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	12,00
a	18,80	21,00	23,00	24,60	25,90	26,00	25,70	25,70	22,00	19,50	17,00	12,50	-	-	-	-	-	-	-
b	8,20	8,90	9,50	9,20	8,00	7,00	5,80	5,80	5,00	4,50	4,00	3,50	-	-	-	-	-	-	-
c	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Illuminant: 3W LED  
Lamp luminous flux emergency (DC)/mains: 120lm/ 120lm – **Rated operating time: 8h**

h	2,50	3,00	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	12,00
a	15,80	17,10	16,80	14,00	12,00	9,50	-	-	-	-	-	-	-	-	-	-	-	-	-
b	6,20	5,10	3,90	3,00	2,00	1,50	-	-	-	-	-	-	-	-	-	-	-	-	-
c	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-