



KBOX 200

Modern IP54 exit sign luminaire made of white polycarbonate for universal mounting. Easy, tool-free installation due to click system.

The luminaire can be used for one-sided wall mounting and two-sided ceiling mounting or for wall bracket mounting.

Wall mounted installation with an enclosed fixed rear wall. Ceiling and wall bracket mounting with click adapter which is also enclosed.

In addition, the luminaire is equipped with light emission windows facing downwards.





The luminaire is equipped with a 1 watt LED bar.



Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonate / white
Type of assembly	Ceiling mounting, wall mounting, wall bracket mounting
Dimensions (W x H x D)	
Ceiling	250 x 156 x 80 mm
Wall	250 x 135 x 82 mm
Wall bracket	271 x 135 x 80 mm
Protection class	IP54
Safety class	II

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	1W LED-bar	1W LED-bar
Light current mains operation	130lm	130lm
Luminous flux		
Emergency (DC)/ mains	-	15% - 50% / 100%
Power consumption	4,5VA	4,5VA
Battery current input	11mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	ELC, MSÜ3, SET009, SET010, DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless

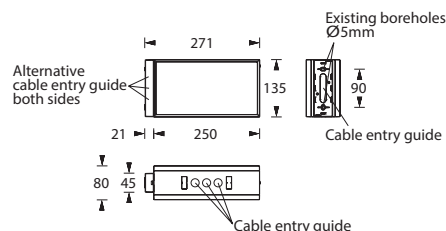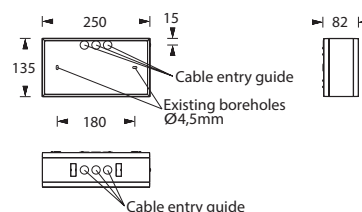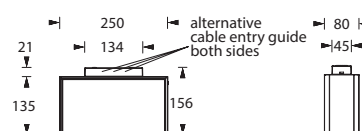

Accessories

Accessories	Pictogram-set*
Wire guard	Exit pictogram FR
Cable assembly set	Exit pictogram FL
Central pendulum	Exit pictogram FU
	Blind pane

* Pictogram-set included in the delivery. Other pictograms available on request.

Technische Änderungen vorbehalten/Technical changes reserved