



23m

1,5W
LED

IP65



IK08

Farbe / Colour
 

PROTECT PE

Exit luminaire with protection class IP65 made of polycarbonate with white reflector and clear light cover for single sided pictogram assembly for wall mounting.

For unprotected outdoor installation, we offer an accessory set with pressure compensation valve. In the versions with heating case, the pressure compensation valve is always integrated in the luminaire.



Optionally, the luminaire can be delivered as a central battery version for a temperature range down to -35°C (unmonitored).


Optional the luminaire is available with a heating case with battery (4,8V 0,8Ah) to use in environments with lowest permissible temperature of -20°C.



Technical specifications

Visibility distance	23 m
Connecting terminals	2 x 2,5 mm ² for double assignment
Casing/colour	Polycarbonat / white (light cover clear)
Type of assembly	Wall mounting
Dimensions (WxHxD)	370 x 140 x 93 mm
Protection class	IP65
Safety class	II

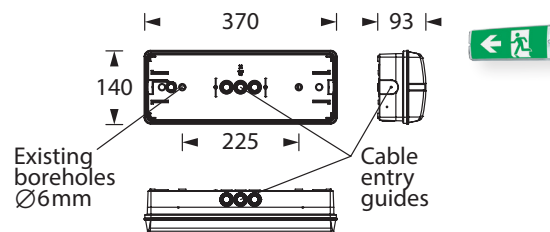


	 Luminaires for central battery systems	 Self contained luminaires
Illuminant	1,5W LED-bar	1,5W LED-bar
Light current mains operation	190lm	190lm
Luminous flux		
Emergency (DC)/mains	-	15% -50% / 100%
Power consumption	5VA	5VA
Battery current input	12mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	-0°C to +35°C ¹⁾
Maintained mode	-	-5°C to +30°C ¹⁾
optional:		
Multi-switch and monitoring module	ELC, MSÜ3 SET009, SET010 DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless




optional: Heating case

¹⁾Optional available with heating case, incl. battery (4,8V 0,8Ah), to use in environments with lowest permissible temperature of -20°C.


Accessories

Wire guard	 Exit pictogram FR
Pressure compensation valve	 Exit pictogram FL
Accessory set for unprotected mounting	 Exit pictogram FU

Pictogram-set*

 Exit pictogram FR

 Exit pictogram FL

 Exit pictogram FU

* Pictogram-set included in the delivery.
Other pictograms available on request.