

2x3W
LED

IP65

IK08

Farbe / Colour


SAFE W-2R-90

Model for wall mounting with two high-performance LEDs and cast acrylic optics. Weather-proof aluminum die-casting housing with a pane of safety glass, for illumination of escape route to the safe area outside a building due to 90° light angle away from the building wall.

Cable inlet into the luminaire possible from the back and from below. Product includes an IP65 membrane pressure compensation valve.

Optionally, the luminaire can be delivered as a central battery version for a temperature range down to -35°C (unmonitored).

The self contained version is also available as a set with an external supply unit for indoor installation and lighting unit for outdoor mounting (suitable for a temperature range to -35°C).

Alternatively, the luminaire is available with a heating case incl. battery to extend the temperature range in the luminaire to -20°C.

Technical specifications

Connecting terminals	3 x 2,5 mm ² for double assignment
Casing/colour	Aluminum die-cast / graphite grey or white
Type of assembly	Wall mounting
Dimensions (W x H x D)	190 x 190 x 115 mm
Protection class	IP65
Safety class	I

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	2 x 3W LED	2 x 3W LED
Light current	480lm	360lm (net)
Rated operating time 1h/3h		480lm (emergency)
Rated operating time 8h		240lm (emergency)
Luminous flux		
Emergency (DC)/net 1h/3h		100%/75%
Emergency (DC)/net 8h		50%/75%
Power consumption	10VA	8VA
Battery current input	25mA	
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h		4,8V 2,0Ah
NiMh-Akku 3h/8h		4,8V 4,2Ah
Temperature range ^{1) 2) 3)}	-20°C to + 40°C	
non-maintained mode		-0°C to + 35°C
maintained mode		-5°C to + 30°C
optional:		
Multi-switch and monitoring module ¹⁾	ELC, MSÜ3, SET009, SET010	
Self monitoring		SELF CHECK
Central monitoring		SAFELOG Line SAFELOG Wireless


¹⁾Lowest permissible temperature -10°C in case of use ELC, MSÜ3, SET009, SET010.

²⁾Optionally available with external supply unit and luminaire housing for temperatures down to -35°C.

³⁾Optional available with heating case, incl. battery, to use in environments with lowest permissible temperature of -20°C within the luminaire.

Accessories

Rear mounting bracket

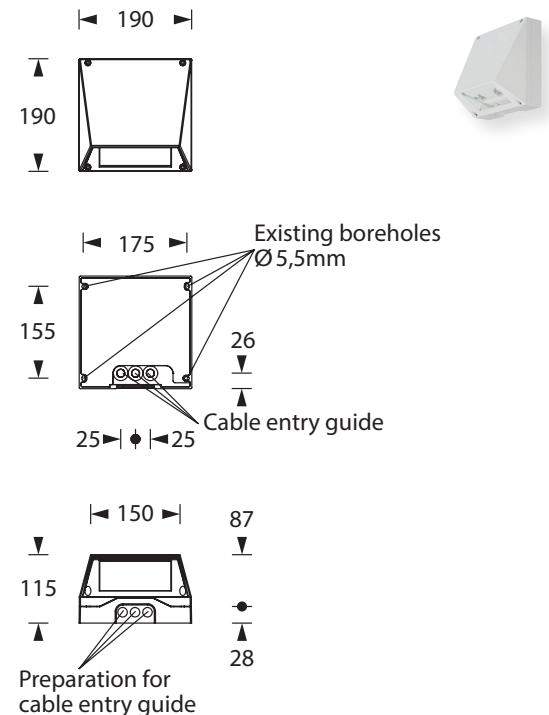


optional: External supply unit



optional: Heating case

Technische Änderungen vorbehalten/Technical changes reserved


Lighting datas and tables of luminaire distances (E = 1,25 lx)



Wall mounting

■ Luminaires for central battery systems

Distance table for plane emergency routes / distance data in meters

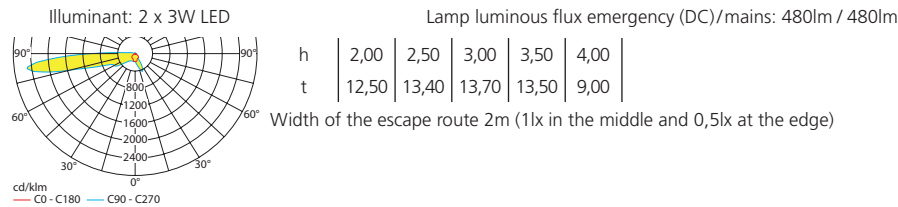

■ Self contained luminaires

Distance table for plane emergency routes / distance data in meters

