

# PROTECT PD

Exit luminaire with protection class IP65 made of polycarbonate with white reflector and opal light cover for double sided pictogram assembly<sup>1</sup>.

Can be used for ceiling or wall mounting. Cable entries possible from above and behind. For wall mounting, an unobtrusive wall mounting bracket with click system is included.

For unprotected outdoor installation, we offer an accessory set with pressure compensation valve. In the versions with heating case, the pressure compensation valve is always integrated in the luminaire.

Optionally, the luminaire can be delivered as a central battery version for a temperature range down to -35°C (unmonitored).

Optional the luminaire is available with a heating case with battery (4,8V 0,8Ah) to use in environments with lowest permissible temperature of -20°C.

## Technical specifications

Visibility distance	32 m
Connecting terminals	2 x 2,5 mm <sup>2</sup> for double assignment
Casing/colour	Polycarbonate / white (light cover opal)
Type of assembly	Universal mounting
Dimensions (W x H x D)	370 x 221 x 140 mm
Protection class	IP65
Safety class	II


	<b>Luminaires for central battery systems</b>	<b>Self contained luminaires</b>
Illuminant	1,5W LED-bar	1,5W LED-bar
Light current mains operation	190lm	190lm
Luminous flux		
Emergency (DC) / mains	-	15% - 50% / 100%
Power consumption	5VA	5VA
Battery current input	12mA	-
Rated operating time		
Battery operation	-	1h / 3h / 8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C <sup>1)</sup>
maintained mode	-	-5°C to +30°C <sup>1)</sup>
optional:		
Multi-switch and monitoring module	ELC, MSÜ3 SET009, SET010, DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless

<sup>1)</sup>Optional available with heating case, incl. battery (4,8V 0,8Ah), to use in environments with lowest permissible temperature of -20°C.



## Accessories

Cable assembly set	
Chain assembly set	
Central pendulum	
Wall bracket, white	
Pressure compensation valve	
Accessory set for unprotected mounting	

## Pictogram-set\*



\* Pictogram-set included in the delivery.  
Other pictograms available on request.

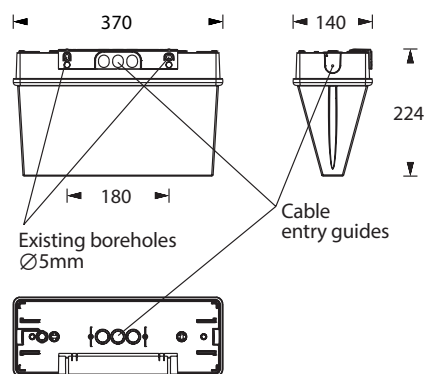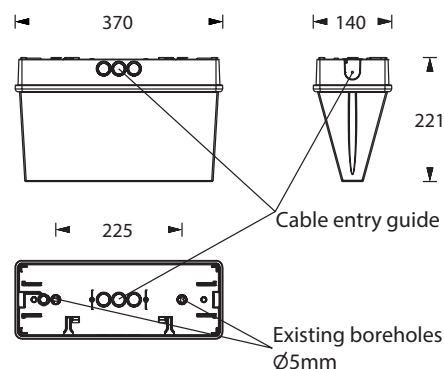

optional: Heating case