

30m

4x3.5W  
LED

IP54


# CUBE W-300

Modern, cubic luminaire housing made of plastic with pre-drilled holes for individual and quick mounting of pictogram foils to be ordered separately.


The luminaire is equipped with 4 x 3.5 Watt high-power LED technology.

## Technical specifications

Visibility distance	30 m
Connecting terminals	2 x 2.5 mm <sup>2</sup> for double assignment
Casing/colour	Plastic, white
Type of assembly	Ceiling mounting (see accessories)
Dimensions (W x H x D)	303 x 166 x 303 mm
Protection class	IP54
Safety class	II

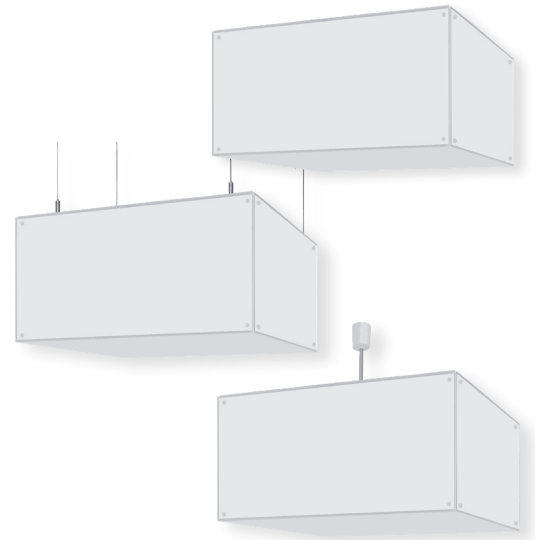

	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	4 x 3.5W LED-bar	4 x 3.5W LED-bar
Light current mains operation	950lm	950lm
Luminous flux		
Emergency (DC) / mains	-	15% - 50% / 100%
Power consumption	13VA	18VA
Battery current input	34mA	-
Rated operating time		
Battery operation	-	1h / 3h / 8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku 1h / 3h	-	4,8V 2,0Ah
NiMh-Akku 8h	-	4,8V 4,2Ah
Temperature range	-10°C to +40°C	-
Non-maintained mode	-	-0°C to +35°C
Maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	ELC, MSÜ3, SET009, SET010, DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG Line SAFELOG Wireless

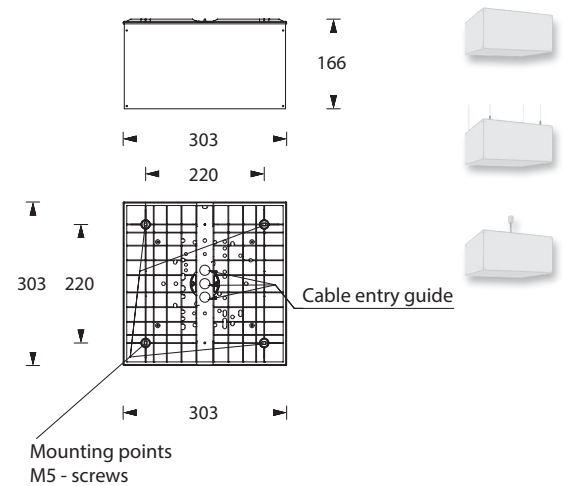

Mounting points  
M5 - screws

## Accessories

Accessories	Pictogram foil sets *
Central pendulum	Pictogram foil set arrow left down/left up
Chain assembly set	Pictogram foil set right down/right up
Cable assembly set	Pictogram foil set arrow left/right/down/up/blind
Wall bracket, white	Pictogram foil set wheelchair
	Pictogram foil set arrow left/right/down/up/ collection point
	Pictogram foil set wheelchair

\* Pictogram foil sets not included in the delivery.  
Other pictogram foils available on request.

## Pictogram mounting



Technische Änderungen vorbehalten / Technical changes reserved