23m | IP40 | 2W LED | Colour

# VARIOLINE 200 UM


**Exit luminaire EN IEC 60598-1/2-22, EN 1838, DIN 4844-1.**
Attractive, architectural design through combination of round and angular anodized aluminum profiles. Optionally usable as ceiling mounting or wall mounting by swiveling the upper part continuously.
The 10 mm light deflecting pane is illuminated with a 2 Watt LED-bar and supplied with a pictogram set - arrow left/right/down/up/blind (Visibility distance 23 m).




## Technical specifications

| Luminaire type | Luminaires for central battery systems | Self contained luminaires |
|---|---|---|
| Illuminant | 2 W LED-bar | 2 W LED-bar |
| Visibility distance | 23 m | |
| Luminance | DIN 4844-1 > 500 cd/m² | |
| Connecting terminals | 3 x 2.5 mm² for double assignment | |
| Colour | white aluminum (silver) | |
| Material | Aluminum | |
| Mounting type | Wall-/ceiling mounting | |
| Dimensions (W x H x D) | DM 258 x 188 x 29 mm<br>WM 258 x 154 x 63 mm | |
| Pane dimensions (W x H x D) | 248 x 148 x 10 mm | |
| Protection class | IP40 | |
| Safety class | I | |
| IK Safety class | IK03 | |
| Light current (mains) | 260 lm | 260 lm |
| Luminous flux Emergency (DC) / mains | | |
| Battery duration 1h | – | 30% / 100% |
| Battery duration 3h | – | 30% / 100% |
| Battery duration 8h | – | 15% / 100% |
| Power consumption | 5.5 VA | 5.5 VA |
| Battery current input | 14 mA | – |
| Battery duration Battery operation | – | 1h / 3h / 8h |
| Voltage supply | 230V 50/60Hz;<br>220V DC +25/-20% | 230V 50/60Hz |
| NiMH-battery | | |
| Battery duration 1h | – | 4,8V 0,8Ah |
| Battery duration 3h | – | 4,8V 0,8Ah |
| Battery duration 8h | – | 4,8V 0,8Ah |
| Temperature range | -10°C to +40°C | – |
| Non-maintained mode | – | 0°C to +35°C |
| Maintained mode | – | -5°C to +30°C |
| optional | | |
| Multi-switch and monitoring module | ELC<br>MSÜ3<br>SET009<br>SET010 | – |
| Self monitoring | – | SELF CHECK |
| Central monitoring | – | SAFELOG Line |
| Wireless monitoring | – | SAFELOG Wireless |

## Ceiling mounting

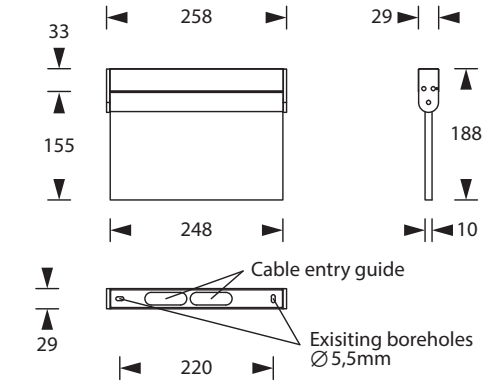


## Wall mounting

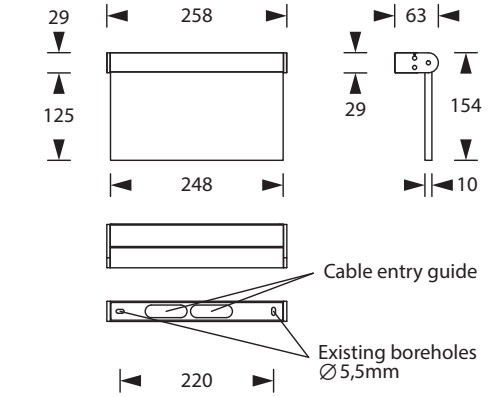




Technical changes reserved / 04.11.2026

## Pictogram-set - included in the delivery



## Optional pictograms (-sets)



## Accessories

| |
|---|
| Wire guard |
| Universal cover plate |
| Cable surface mounting set |
| Pictograms |