



# SAFE W

Weather-proof housing made of aluminum die-casting with a pane of safety glass. Model for wall mounting with two or four high-performance LEDs and cast acrylic optics for wide area illumination or escape route illumination.

Cable inlet into the luminaire possible from the back and from below. Product includes an IP65 membrane pressure compensation valve.

Optionally, the luminaire can be delivered as a central battery version for a temperature range down to -35°C (unmonitored).

The self contained version is also available as a set with an external supply unit for indoor installation and lighting unit for outdoor mounting (suitable for a temperature range to -35°C).

Alternatively, the luminaire is available with a heating case incl. battery to extend the temperature range in the luminaire to -20°C.

## Technical specifications

Connecting terminals	3 x 2,5 mm <sup>2</sup> for double assignment
Casing/colour	Aluminum die-cast / graphite grey or white
Type of assembly	Wall mounting
Dimensions (WxHxD)	190 x 190 x 115 mm
Protection class	IP65
Safety class	I

	■ Luminaires for central battery systems		■ Self contained luminaires	
	2 x 3W LED	4 x 3W LED	2 x 3W LED	4 x 3W LED
Illuminant	2 x 3W LED	4 x 3W LED	2 x 3W LED	4 x 3W LED
Light current	480lm	960lm	360lm (net)	960lm (net)
Rated operating time 1h/3h			480lm (emergency)	580lm (emergency)
Rated operating time 8h			240lm (emergency)	320lm (emergency)
Luminous flux				
Emergency (DC)/net 1h/3h			100% / 75%	60% / 100%
Emergency (DC)/net 8h			50% / 75%	30% / 100%
Power consumption	10VA	19,2VA	8VA	1h: 18,7 VA 3h/8h: 20,3 VA
Battery current input	25mA	50mA		
Voltage supply	230V 50/60Hz / 220V DC +25/-20%		230V 50/60Hz	
NiMh-Akku 1h			4,8V 2,0Ah	
NiMh-Akku 3h/8h			4,8V 4,2Ah	
Temperature range <sup>1) 2) 3)</sup>	-20°C to + 40°C		-0°C to + 35°C	
non-maintained mode			-5°C to + 30°C	
maintained mode				
optional:				
Multi-switch and monitoring module <sup>1)</sup>	ELC, MSÜ3, SET009, SET010			
Self monitoring			SELF CHECK	
Central monitoring			SAFELOG Line SAFELOG Wireless	

<sup>1)</sup>Lowest permissible temperature -10°C in case of use ELC, MSÜ3, SET009, SET010.


<sup>2)</sup>Optionally available with external supply unit and luminaire housing for temperatures down to -35°C.

<sup>3)</sup>Optional available with heating case, incl. battery, to use in environments with lowest permissible temperature of -20°C within the luminaire.


## Accessories

Rear mounting bracket	Bollard in graphite grey, 1m height
Pole and wall holder	Ground anchor for bollard in graphite grey

## Lighting datas and tables of luminaire distances (E = 1,25 lx)



Wall mounting

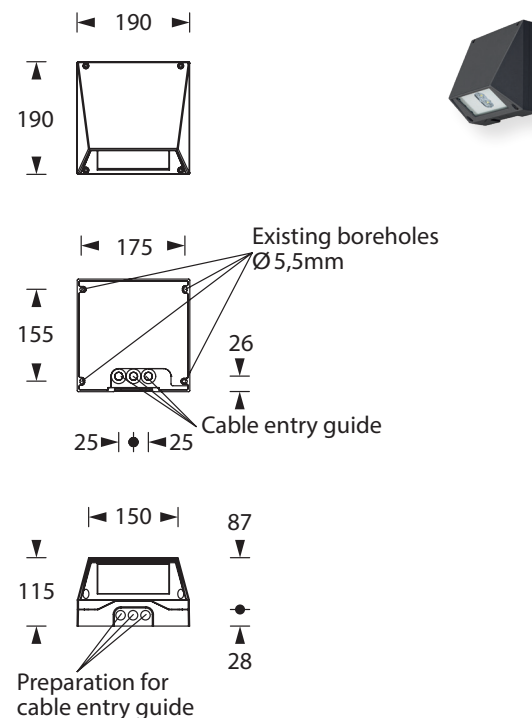

optional: External supply unit




optional: Heating case

Technische Änderungen vorbehalten/Technical changes reserved

**Luminaires for central battery systems Wide area optic**

Distance table for plane emergency routes / distance data in meters




Lamp luminous flux emergency (DC)/mains: 480lm / 480lm

t	Poller	Lamp luminous flux emergency (DC)/mains: 480lm / 480lm							
		1,00	2,00	2,50	3,00	3,50	4,00	4,50	5,00
t=1.0m	a	6,50	10,00	11,50	12,50	13,50	14,50	15,00	15,50
	b	2,90	4,50	5,00	5,50	5,50	6,00	6,00	5,50
	a	7,50	10,50	12,00	13,50	14,50	15,00	15,50	15,50
t=2.0m	b	3,20	4,50	5,00	5,50	5,50	5,50	5,50	5,50
	a	7,50	11,50	12,50	13,50	14,00	14,50	15,00	15,50
t=3.0m	b	2,50	4,50	4,50	5,00	5,00	5,00	5,00	5,00

t = distance to escape middle

**Self contained luminaires Wide area optic**


Distance table for plane emergency routes / distance data in meters



Lamp luminous flux emergency (DC)/mains: 480lm/360lm – **Rated operating time: 1h/3h**

t	Poller	Lamp luminous flux emergency (DC)/mains: 480lm/360lm – <b>Rated operating time: 1h/3h</b>							
		1,00	2,00	2,50	3,00	3,50	4,00	4,50	5,00
t=1.0m	a	6,50	10,00	11,50	12,50	13,50	14,50	15,00	15,50
	b	2,90	4,50	5,00	5,50	5,50	6,00	6,00	5,50
	a	7,50	10,50	12,00	13,50	14,50	15,00	15,50	15,50
t=2.0m	b	3,20	4,50	5,00	5,50	5,50	5,50	5,50	5,50
	a	7,50	11,50	12,50	13,50	14,00	14,50	15,00	15,50
t=3.0m	b	2,50	4,50	4,50	5,00	5,00	5,00	5,00	5,00

t = distance to escape middle




Lamp luminous flux emergency (DC)/mains: 240lm/360lm – **Rated operating time: 8h**

t	Poller	Lamp luminous flux emergency (DC)/mains: 240lm/360lm – <b>Rated operating time: 8h</b>							
		1,00	2,00	2,50	3,00	3,50	4,00	4,50	5,00
t=1.0m	a	6,00	9,00	10,00	10,50	11,00	11,50	11,50	11,00
	b	2,70	4,00	4,00	4,00	4,00	3,50	3,50	3,50
	a	6,30	9,00	10,00	10,50	11,00	11,00	10,50	10,50
t=2.0m	b	2,70	3,50	3,50	3,50	3,50	3,50	3,00	3,00
	a	4,80	7,50	8,50	9,00	9,50	9,50	10,00	9,50
t=3.0m	b	1,00	2,50	3,00	3,00	3,00	2,50	2,50	2,00

t = distance to escape middle

**Luminaires for central battery systems Escape route optic**

Distance table for plane emergency routes / distance data in meters




Lamp luminous flux emergency (DC)/mains: 480lm / 480lm

t	Poller	Lamp luminous flux emergency (DC)/mains: 480lm / 480lm														
		1,90	2,00	2,10	2,30	2,50	2,70	2,90	3,00	3,10	3,30	3,50	4,00	4,50	5,00	
t=1.0m	a	11,00	16,50	17,00	17,50	18,50	19,00	20,00	20,50	21,00	21,50	21,50	19,50	16,50	15,00	
	b	5,00	7,50	7,50	8,00	8,00	8,50	8,50	8,50	8,50	8,00	8,00	6,50	5,50	5,00	
	a	9,50	17,50	18,00	18,50	19,00	20,50	20,50	21,50	22,00	22,00	23,00	23,00	22,50	20,50	18,00
t=1.5m	b	3,00	7,50	8,00	8,00	8,50	8,50	9,00	9,00	9,00	9,00	9,00	8,00	6,00	5,50	
	a	6,50	17,50	18,00	18,50	20,00	21,00	22,00	22,50	23,00	23,50	24,00	24,50	25,00	24,00	23,00
t=2.0m	b	2,50	7,00	7,50	8,00	8,50	8,50	9,00	9,50	9,50	9,50	9,50	9,00	8,00	7,00	

t = distance to escape middle

**Self contained luminaires Escape route optic**


Distance table for plane emergency routes / distance data in meters



Lamp luminous flux emergency (DC)/mains: 480lm/360lm – **Rated operating time: 1h/3h**

t	Poller	Lamp luminous flux emergency (DC)/mains: 480lm/360lm – <b>Rated operating time: 1h/3h</b>														
		1,90	2,00	2,10	2,30	2,50	2,70	2,90	3,00	3,10	3,30	3,50	4,00	4,50	5,00	
t=1.0m	a	11,00	16,50	17,00	17,50	18,50	19,00	20,00	20,50	21,00	21,50	21,50	19,50	16,50	15,00	
	b	5,00	7,50	7,50	8,00	8,00	8,50	8,50	8,50	8,50	8,00	8,00	6,50	5,50	5,00	
	a	9,50	17,50	18,00	18,50	19,00	20,50	20,50	21,50	22,00	22,00	23,00	23,00	22,50	20,50	18,00
t=1.5m	b	3,00	7,50	8,00	8,00	8,50	8,50	9,00	9,00	9,00	9,00	9,00	8,00	6,00	5,50	
	a	6,50	17,50	18,00	18,50	20,00	21,00	22,00	22,50	23,00	23,50	24,00	24,50	25,00	24,00	23,00
t=2.0m	b	2,50	7,00	7,50	8,00	8,50	8,50	9,00	9,50	9,50	9,50	9,50	9,00	8,00	7,00	

t = distance to escape middle




Lamp luminous flux emergency (DC)/mains: 240lm/360lm – **Rated operating time: 8h**

t	Poller	Lamp luminous flux emergency (DC)/mains: 240lm/360lm – <b>Rated operating time: 8h</b>														
		1,90	2,00	2,10	2,30	2,50	2,70	2,90	3,00	3,10	3,30	3,50	4,00	4,50	5,00	
t=1.0m	a	9,70	14,50	15,00	15,50	16,00	16,50	17,00	17,00	17,00	16,50	16,00	15,50	12,50	11,00	10,00
	b	4,30	6,50	6,50	6,50	6,50	6,50	6,50	6,00	6,00	5,50	5,00	4,50	4,00	3,00	
	a	8,20	15,00	15,50	16,00	16,50	17,00	17,50	17,50	17,50	17,00	17,00	15,50	12,00	11,00	
t=1.5m	b	2,60	6,50	6,50	6,50	6,50	6,50	6,50	6,00	6,00	6,00	5,50	4,50	4,00	4,00	
	a	4,70	12,50	12,50	13,00	14,00	15,50	16,50	17,00	17,50	17,50	18,00	17,50	15,50	15,50	13,50
t=2.0m	b	1,50	4,00	4,50	5,00	5,50	5,50	6,00	6,00	6,00	6,00	6,00	5,00	4,50	4,00	

t = distance to escape middle

**Luminaires for central battery systems Wide area optic**

Distance table for plane emergency routes / distance data in meters




Lamp luminous flux emergency (DC)/mains: 960lm/960lm

		h	1,00	2,00	2,50	3,00	3,50	4,00	4,50	5,00
t=1.0m	a	6,80	10,50	12,00	13,50	14,50	16,00	17,00	18,00	
	b	3,00	4,50	5,50	6,00	6,50	7,00	7,50	7,50	
t=2.0m	a	8,20	12,00	13,50	15,00	16,00	17,50	18,00	19,00	
	b	3,80	5,50	6,00	6,50	7,00	7,50	7,50	8,00	
t=3.0m	a	8,70	13,00	14,50	16,00	17,00	18,00	19,00	20,00	
	b	3,80	5,50	6,00	6,50	7,00	7,50	7,50	7,50	

t = distance to escape middle

**Self contained luminaires Wide area optic**


Distance table for plane emergency routes / distance data in meters



Lamp luminous flux emergency (DC)/mains: 580lm/960lm – Rated operating time: 1h/3h

		h	1,00	2,00	2,50	3,00	3,50	4,00	4,50	5,00
t=1.0m	a	6,30	10,00	11,00	12,00	13,50	14,50	15,50	16,00	
	b	2,70	4,50	5,00	5,50	5,50	6,00	6,00	6,50	
t=2.0m	a	7,50	11,00	12,50	13,50	14,50	15,50	16,00	16,50	
	b	3,30	4,50	5,00	5,50	6,00	6,00	6,00	6,00	
t=3.0m	a	7,50	11,50	13,00	14,00	15,00	15,50	16,00	16,50	
	b	3,00	4,50	5,00	5,50	5,50	6,00	6,00	6,00	

t = distance to escape middle




Lamp luminous flux emergency (DC)/mains: 320lm/960lm – Rated operating time: 8h

		h	1,00	2,00	2,50	3,00	3,50	4,00	4,50	5,00
t=1.0m	a	5,80	9,00	10,00	11,00	12,00	12,50	12,50	13,00	
	b	2,50	4,00	4,50	4,50	4,50	4,50	4,50	4,50	
t=2.0m	a	6,20	9,50	10,50	11,50	12,00	12,50	12,50	12,50	
	b	2,80	4,00	4,50	4,50	4,50	4,50	4,00	4,00	
t=3.0m	a	6,00	9,00	10,00	10,50	11,00	11,50	11,50	11,50	
	b	1,80	3,50	3,50	3,50	3,50	3,50	3,00	2,50	

t = distance to escape middle

**Luminaires for central battery systems Escape route optic**

Distance table for plane emergency routes / distance data in meters




Lamp luminous flux emergency (DC)/mains: 960lm/960lm

		h	1,00	1,90	2,00	2,10	2,30	2,50	2,70	2,90	3,00	3,10	3,30	3,50	4,00	4,50	5,00
t=1.0m	a	11,50	17,50	18,00	18,00	19,00	20,00	20,00	21,00	22,00	22,50	23,00	24,00	24,50	26,50	26,50	26,00
	b	5,00	8,00	8,00	8,50	9,00	9,50	9,50	10,00	10,00	10,00	10,50	10,50	10,50	10,50	9,50	8,50
t=1.5m	a	11,00	19,00	19,00	19,50	20,00	21,00	22,00	23,00	23,50	24,00	25,00	25,00	25,00	28,00	29,50	30,00
	b	4,50	8,50	8,50	9,00	9,50	9,50	10,00	10,50	10,50	11,00	11,00	11,50	12,00	11,50	11,00	
t=2.0m	a	9,00	20,00	20,00	21,00	22,00	23,00	24,00	25,00	25,50	25,50	25,50	26,50	27,50	29,00	30,50	32,00
	b	3,50	9,00	9,00	9,50	10,00	10,50	11,00	11,00	11,00	11,50	11,50	12,00	12,50	12,50	12,00	

t = distance to escape middle

**Self contained luminaires Escape route optic**


Distance table for plane emergency routes / distance data in meters



Lamp luminous flux emergency (DC)/mains: 580lm/960lm – Rated operating time: 1h/3h

		h	1,00	1,90	2,00	2,10	2,30	2,50	2,70	2,90	3,00	3,10	3,30	3,50	4,00	4,50	5,00
t=1.0m	a	10,50	16,00	16,50	17,00	18,00	19,00	19,50	20,00	20,50	20,50	21,00	21,50	21,50	21,50	18,00	
	b	4,70	7,50	7,50	8,00	8,00	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,00	7,50	6,50	6,00
t=1.5m	a	9,10	17,00	17,50	17,50	18,50	19,50	20,00	21,00	21,50	21,50	22,50	23,00	24,50	24,50	23,00	
	b	3,40	8,00	8,00	8,00	8,50	8,50	9,00	9,00	9,50	9,50	9,50	9,00	9,00	9,00	8,50	7,00
t=2.0m	a	7,20	17,50	18,00	18,00	19,00	20,00	21,00	21,50	22,00	22,50	23,00	23,50	25,00	25,50	24,00	
	b	2,80	8,00	8,00	8,50	8,50	8,50	9,00	9,50	9,50	9,50	9,50	9,50	9,50	9,50	8,00	

t = distance to escape middle



Lamp luminous flux emergency (DC)/mains: 320lm/960lm – Rated operating time: 8h

		h	1,00	1,90	2,00	2,10	2,30	2,50	2,70	2,90	3,00	3,10	3,30	3,50	4,00	4,50	5,00
t=1.0m	a	9,00	15,00	15,50	15,50	16,50	17,00	17,50	18,00	18,00	17,50	17,00	16,00	15,50	14,00	12,50	
	b	4,00	6,50	6,50	7,00	7,00	7,00	7,00	6,50	6,50	6,50	6,00	5,00	5,00	4,50	4,00	
t=1.5m	a	6,50	15,00	15,50	16,50	17,00	17,50	18,00	18,50	19,00	19,00	19,00	18,50	18,00	16,50	13,50	
	b	2,50	6,50	6,50	7,00	7,00	7,50	7,50	7,00	7,00	7,00	6,50	6,50	5,50	5,00	4,00	
t=2.0m	a	5,50	15,00	15,50	16,50	17,00	18,00	19,00	19,50	19,50	20,00	20,50	20,50	20,00	19,50	18,00	
	b	2,00	5,00	5,50	5,50	6,00	6,50	7,00	7,00	7,00	7,00	7,00	6,50	6,50	5,50	5,00	

t = distance to escape middle